

TECHNICAL DATA SHEET FOR THE AMBIENTIKA LOW REVEAL INSTALLATION KIT


Description:

Assembly kit for installing the AMBIENTIKA heat recuperator with external part coming out of a window frame and not from an external wall as usual, consisting of:

- 1 grille for outside made from white PVC with an external dimension frame of 75 x 250 mm;
- 1 white PVC pipe with a right-angled cross section of 54 x 216, insulated on the outside with 3-mm cladding, enlarging the external dimension to 60 x 222 mm, and at the opposite end of which is a ring clamp with a gasket for the connector to the existing pipe unit with an external diameter of 160.
- 1 54 x 216 mm polystyrene closure already attached to protect the right-angled pipe, which must be removed after completing the installation of the Ambientika kit/unit and before installing the outer grille.

The 60 x 222 mm pipe that can be cut to size on site if required, is to be installed with an inclination of 3° towards the grille to prevent the water from accumulating in the pipe if necessary.

Dimensioned drawing of the assembly kit installed on a window frame (with min. and max. dimensions)

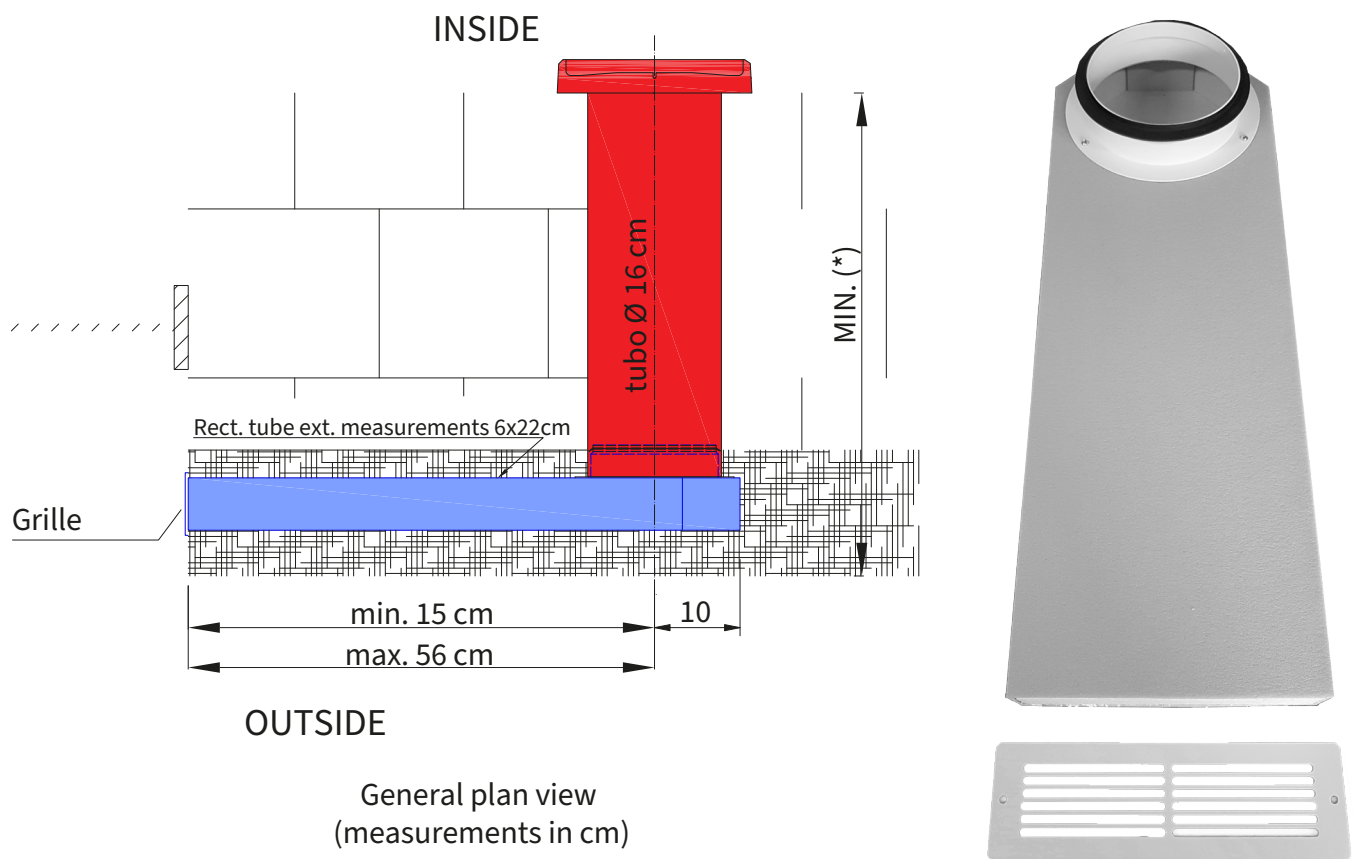

Minimum wall thickness = 33cm